


Wiring Instructions for 60-0-60 Ammeter

AM-94136N
Revised 05-95
Section 65
(00-02-0207)



Please read these instructions carefully before installing. All instructions refer to viewing from the rear.

1. Disconnect battery ground cable.
2. Connect an 8 AWG (10.0 mm²) wire, minimum, with a insulation temperature rating of 220°F (105°C), minimum, from the battery terminal of the alternator to the left terminal on the ammeter (see wiring diagram).
3. Connect an 8 AWG (10.0 mm²) wire, minimum, with a insulation temperature rating of 220°F (105°C), minimum, from the battery “+” terminal on the starter solenoid to the right terminal on the ammeter (see wiring diagram).
4. Connect ammeter lamp (60-0-60-I only) to existing instrument panel lighting circuit.
5. Reconnect the battery ground cable.
6. If ammeter shows a positive charge when starter is engaged, reverse connections on back of ammeter.

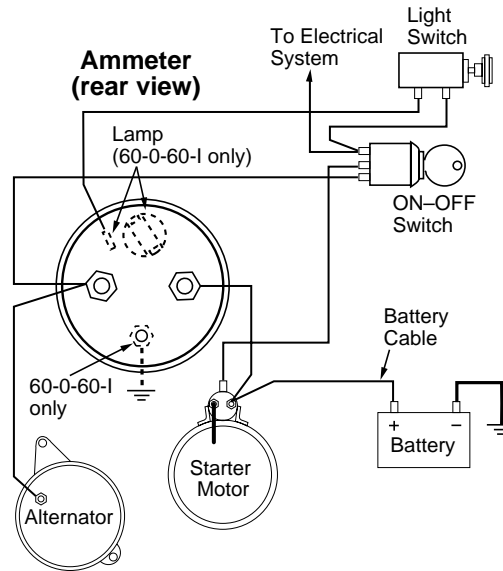

■ **Frank W. Murphy Manufacturer**
P.O. Box 470248; Tulsa, Oklahoma 74147; USA
tel. (918) 627-3550 fax (918) 664-6146
e-mail fwmurphy@ionet.net

■ **Frank W. Murphy Southern Division**
P.O. Box 1819; Rosenberg, Texas 77471; USA
tel. (281) 342-0297 fax (281) 341-6006
e-mail murphysd@intertex.net

■ **Frank W. Murphy, Ltd.**
Church Rd.; Laverstock, Salisbury SP1 1QZ; U.K.
tel. +44 1722 410055 fax +44 1722 410088 tlx 477088
e-mail sales@fwmurphy.co.uk

■ **Frank W. Murphy Pte., Ltd.**
26 Siglap Drive; Republic of Singapore 456153
tel. +65 241-3166 fax +65 241-8382
e-mail fwmsales@fwmurphy.com.sg

■ **Murphek Pty., Ltd.**
1620 Hume Highway; Campbellfield, Vic 3061; Australia
tel. +61 3 9358-5555 fax +61 3 9358-5558

■ **Murphy de México, S.A. de C.V.**
Bldv. Antonio Rocha Cordero 300, Fracción del Aguaje
San Luis Potosí, S.L.P.; México 78384
tel. +52-48-206264 fax +52-48-206336
e-mail murmexsl@infosel.net.mx

■ **Murphy Switch of California**
P.O. Box 900788; Palmdale, California 93590; USA
tel. (805) 272-4700 fax (805) 947-7570
e-mail sales@murphyswitch.com

■ **Frank W. Murphy France**
tel. +33 1 30 762626 fax +33 1 30 763989