


IF IN DOUBT ASK

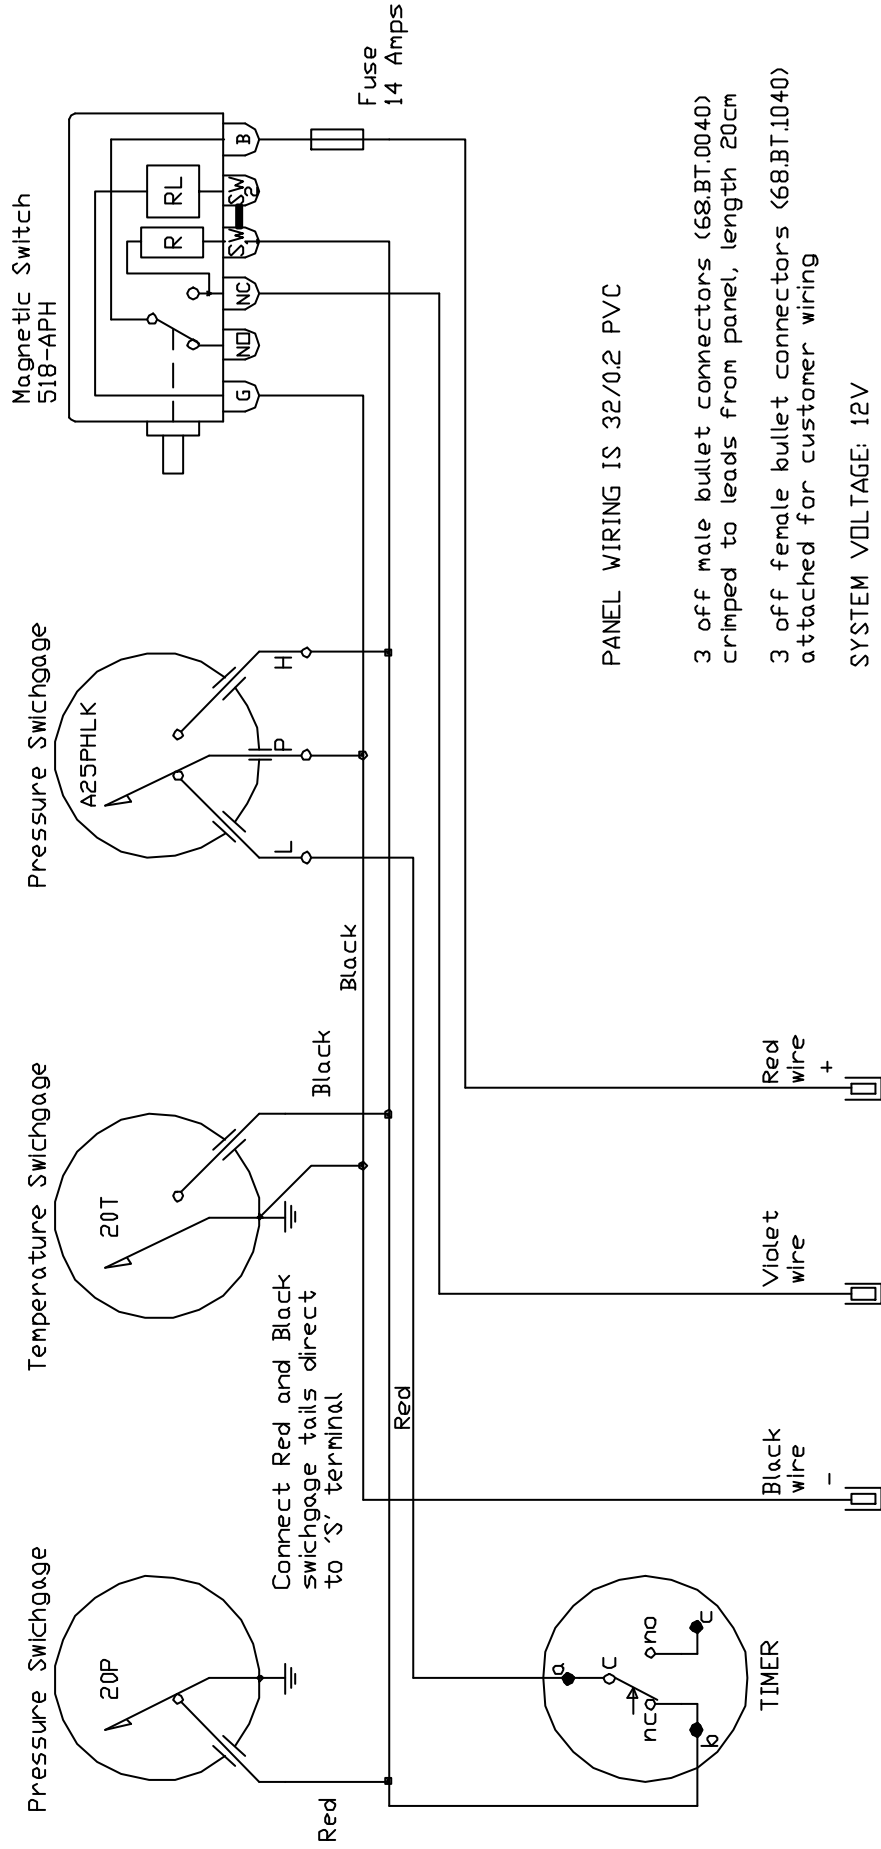

PANEL WIRING IS 32/0.2 PVC

3 off male bullet connectors (68.BT.0040) crimped to leads from panel, length 20cm  
 3 off female bullet connectors (68.BT.1040) attached for customer wiring

SYSTEM VOLTAGE: 12V

TO BATTERY NEGATIVE TERMINAL  
 TO CONTROL SOLENOID (GENERISE TO RUN)  
 TO BATTERY POSITIVE TERMINAL

SWITCHGAGE HOUSE, CHURCH ROAD, LIVERSTOCK,  
 WILTSHIRE, SALISBURY, ENGLAND, SP1 1JZ.  
 TELEPHONE +44 1728 410055  
 FAX +44 1728 410088  
 e-mail sales@wmurphy.co.uk  
 Visit Our Web Site At -  
 WWW.FWMURPHY.CO.UK

TITLE	WD275-12V
DRAWING No	TE5919

Tolerancing		
Linear	Dimensions	in mm
0.5	6	30
to	to	to
to	to	to
±0.1	±0.2	±0.3
±0.1	±0.2	±0.3
±0.8	±1.2	±2

MAT.	N/A
FINISH	N/A
SCALE	NTS
DRAWN AS	AS
DATE	04/05/00

REVISION	DETAILS	DATE	NAME