

## 4-STEP MASTERCRAFT ZERO OFF GAUGE INSTALLATION GUIDE

The Zero Off Team would like to thank you for purchasing the Zero Off GPS Speed control system. To ensure the proper functionality of the Zero Off gauge please follow the 4 Step installation guide. The entire process should take about 15 minutes. Please be sure to remove the key and disconnect the battery


1. **Lift dash:**

- a. Remove the plastic fasteners from the front of the dash:



- i. Hint: Use something to support your flat head screw driver so you don't scratch the dash.

- b. Remove 2 Phillips head screws from the front

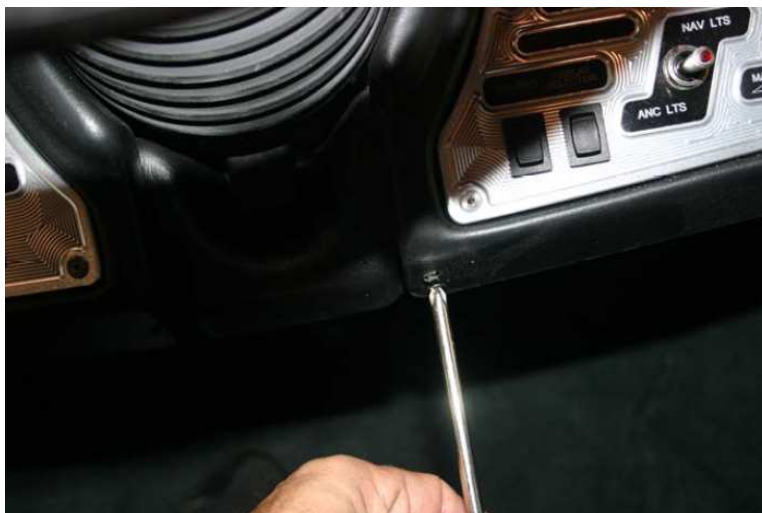

- c. Raise the dash enough to work behind it (do not completely remove the dash) Hint: For better access use 3/4 in. socket and remove the steering wheel.



- i. Hint: Be sure to keep the steering wheel in a horizontal position when you remove it as an aide to reinstalling it with proper orientation.

## 2. Install the head unit

- a. Remove the factory installed gauge tabs.
- b. Insert the Zero Off Gauge face plate first from behind the dash
  - i. Hint: Unplugging some of the other gauges will allow you to completely turn the dash over if necessary.



- ii. Be sure that the gauge is level and square inside the opening then apply pressure to the back of the gauge be sure that it is securely locked in place in the opening.



- c. Reinstall the factory gauge tabs
  - i. Hint: Remove the star washers from the gauge tabs if necessary to extend the screws.



**3. Reinstall the dash**

- a. Using the existing hardware reinstall the dash
- b. Reconnect the battery
- c. Start the boat. The Zero Off screen will power up; The splash screen will appear.



**4. Installation is complete!**