

AC Current Overload Relay

OLR605



- **AC over current protection**
- **Adjustable full load setting, with proportional current / time response**
- **Adjustable 'Instant trip' setting**
- **DIN rail / surface mountable**

Description

The OLR605 is a relay-based device, used for protecting mains or generator AC supplies against overload or short circuit faults. An internal digital counter/timer provides an accurate, measured response, giving an instant trip for large over-current faults and longer time delays for less severe overloads.

The unit operates with 3 external current transformers (not supplied). These are wired as separate circuits (without star point) to give between 3 and 5 Amps at system full load current: current transformers with 5 Amp secondary coils are normally therefore used.

The front facia 'Set Full Load' potentiometer is set (between 3 and 5 Amps) to match the CT secondary current at full AC load. With DC power applied and all three phase currents below the 'set full load' level, the OLR's relay is energised and the front facia left-hand LED is lit.

The right hand 'full load' LED lights if any phase current rises above the full load setting. If any phase current increases to above 110% of full load, the OLR starts its internal counter/timer. Sustained overloads cause the count to increase (more quickly for higher currents) and the relay will de-energise if the counter becomes full: see overleaf for a current/time response curve. If, however, the current returns below the full load level, the count will decrease (more quickly for lower currents), the relay will remain energised and the counter will eventually reset.

Additional control is provided by a front facia 'set instant trip' potentiometer, expressed in multiples of the full load current. If the measured current exceeds this level, the OLR trips instantly, regardless of the normal current/time curve.

Once the relay de-energises and the load current reduces, the counter/timing circuit ensures that the relay does not re-energise for some time: the actual time is again

Product Specification

Power supply:	
operating voltage range	12 V units: 9 - 15 VDC 24 V units: 18 - 30 VDC
power consumption	< 1.5 W
AC input	3 phase current transformers 5 Amp secondary coil
Trip Adjustment	
full load adjustment	3 – 5 Amps (secondary coil current)
instant trip adjustment	1 – 3 times full load
Relay output:	
contact type	SPDT (volt free)
current rating	5A max. @ 240 VAC (resistive)
rated operations	2 x 10 ⁵ operations
trip time	load variable (curve overleaf)
General:	
operating temperature	-10 to +55°C
weight	approx. 360 g
dimensions (w x h x d)	50 x 75 x 110 mm


dependent on the level of measured load current (typically 15 seconds if the load current falls to zero).

The OLR605 is powered using a DC/battery supply, 12V or 24V (please specify). The unit is housed in a robust polycarbonate case, designed for DIN rail or surface mounting.


Warranty

A two year limited warranty on materials and workmanship is given with this Murphy product. Details are available on request and are packed with each unit.

Electrical Connection

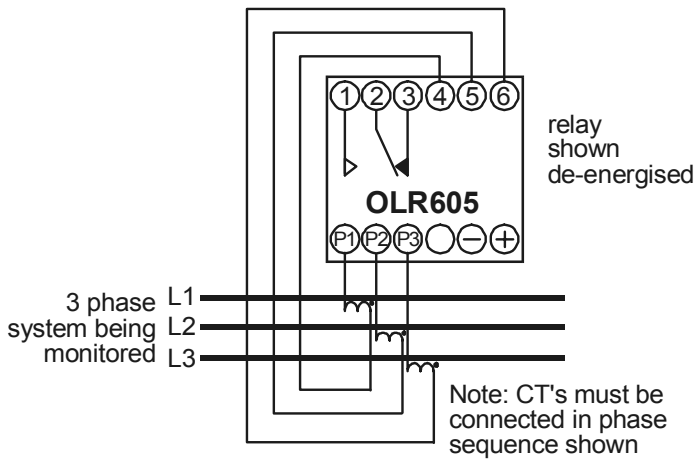


Trip Current / Time Response

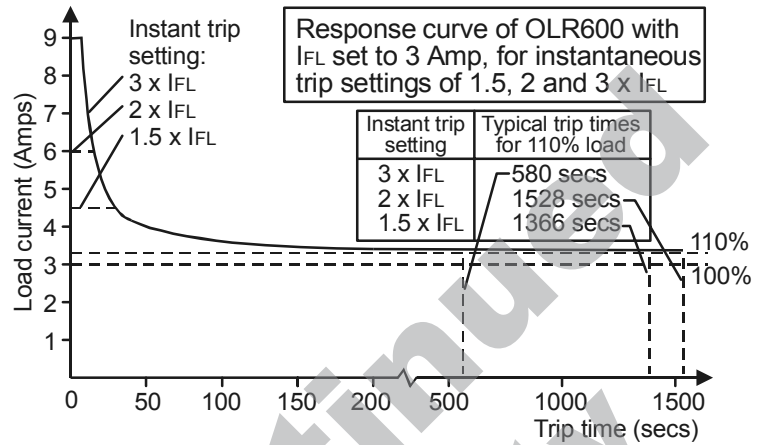

How To Order

Stock code	Model, description
76.70.0246	OLR605/A, 12 VDC supply
76.70.0172	OLR605/B, 24 VDC supply

Dimensions

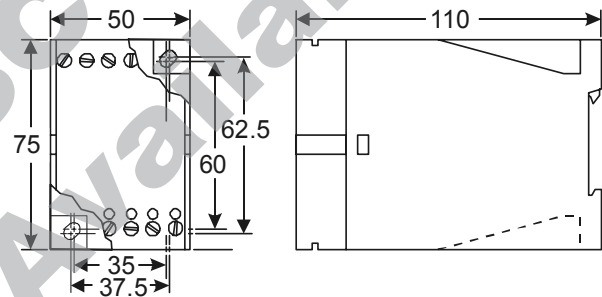

FWMurphy

PO Box 470248
Tulsa, Oklahoma 74147, USA
tel: (918) 627 3550
fax: (918) 664 6146
email: sales@fwmurphy.com
web: www.fwmurphy.com

CONTROL SYSTEMS AND SERVICES DIVISION
PO Box 1819, Rosenberg, Texas 77471, USA
tel: (281) 342 0297
fax: (281) 341 6006
email: sales@fwmurphy.com

MURPHY DE MEXICO S.A. DE C.V.
Blvd. Antonio Rocha Cordero 300, Fracción del Aguaje
San Luis Potosí, S.L.P. México 78384
tel: + 52 48 206264
fax: + 52 48 206336
email: ventasmex@murphymex.com.mx
web: www.murphymex.com.mx

FRANK W. MURPHY LTD.
Church Rd, Laverstock, Salisbury, SP1 1QZ, UK
tel: +44 1722 410055
fax: +44 1722 410088
email: sales@fwmurphy.co.uk
web: www.fwmurphy.co.uk

MURPHY SWITCH OF CALIFORNIA
41343 12th Street West,
Palmdale, CA 93551-1442, USA
tel: (661) 272 4700
fax: (661) 947 7570
email: sales@murphyswitch.com
web: www.murphyswitch.com

MACQUARRIE CORPORATION
1620 Hume Highway,
Campbellfield, Victoria 3061, Australia
tel: +61 3 9358 5555
fax: +61 3 9358 5558
email: murphy@macquarrie.com.au



In order to consistently bring you the highest quality, full featured products, we reserve the right to change our specifications and designs at any time.