
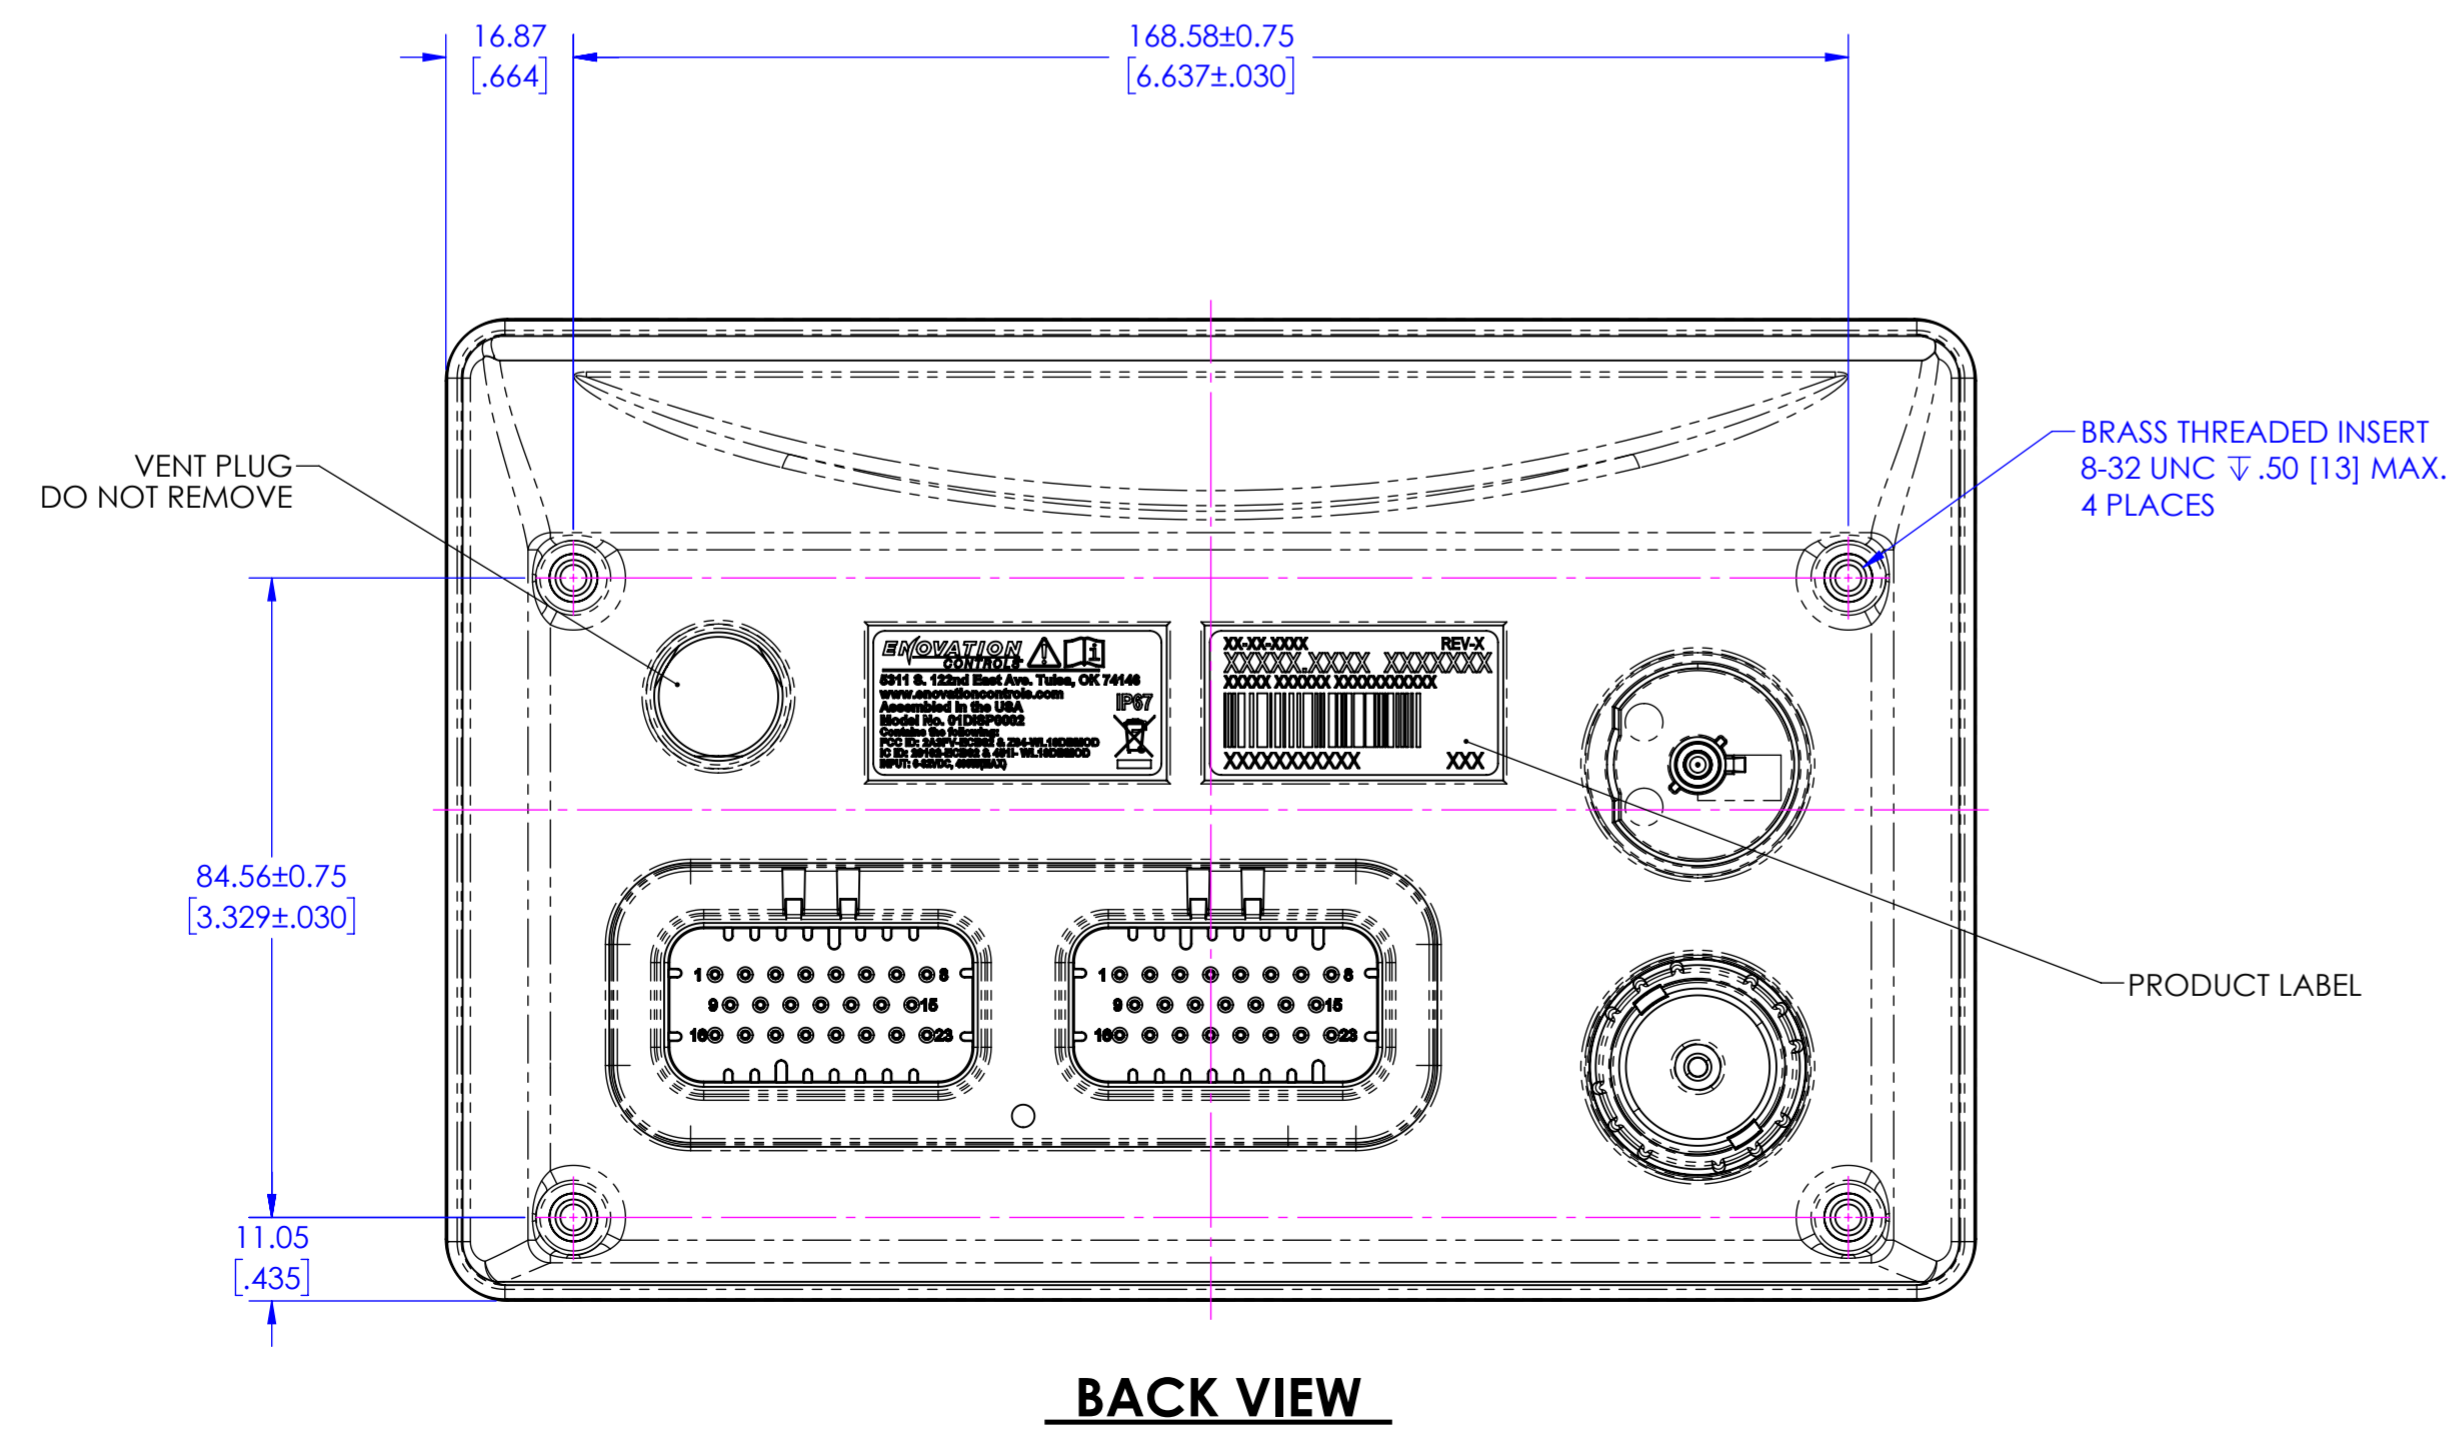
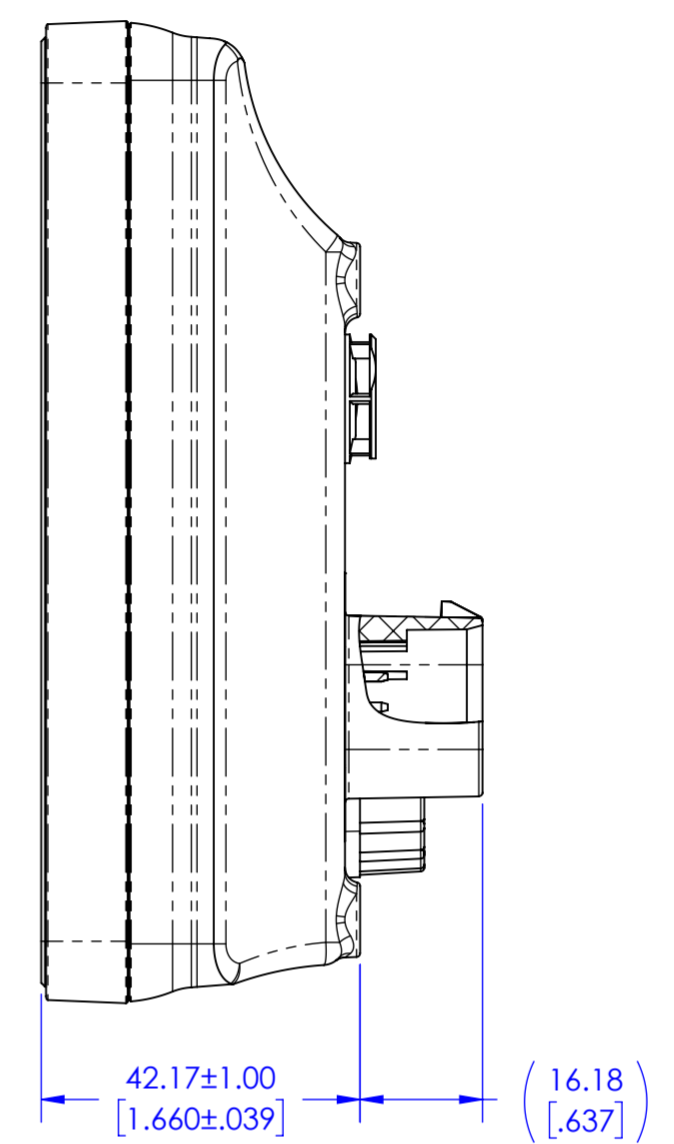


PROPRIETARY and CONFIDENTIAL This document, including the information hereon, is the property of ENOVATION CONTROLS, INC., its subsidiaries, and/or affiliates (hereinafter "ENOVATION CONTROLS"). It may be used only to purchase or supply goods and/or services relative to ENOVATION CONTROLS and must be returned upon ENOVATION CONTROLS request. It is CONFIDENTIAL and must be maintained in confidence. It may not be reproduced, copied or have other items prepared therefrom and may not be disclosed to others, in whole or in part, without ENOVATION CONTROLS prior written consent. ALL RIGHTS RESERVED.

REVISIONS						
ZONE	REV.	ECO#	DESCRIPTION	DATE (YYYY.MM.DD)	BY	APPVD
-	A-	C05876	INITIAL PRODUCTION RELEASE	2023.09.13	JP	CR
-	A1	C06036	REVISED DESCRIPTION "PV-P70" WAS "COSMO", ADDED HOW TO ORDER INFO (SHEET 2)	2023.11.16	JP	CL

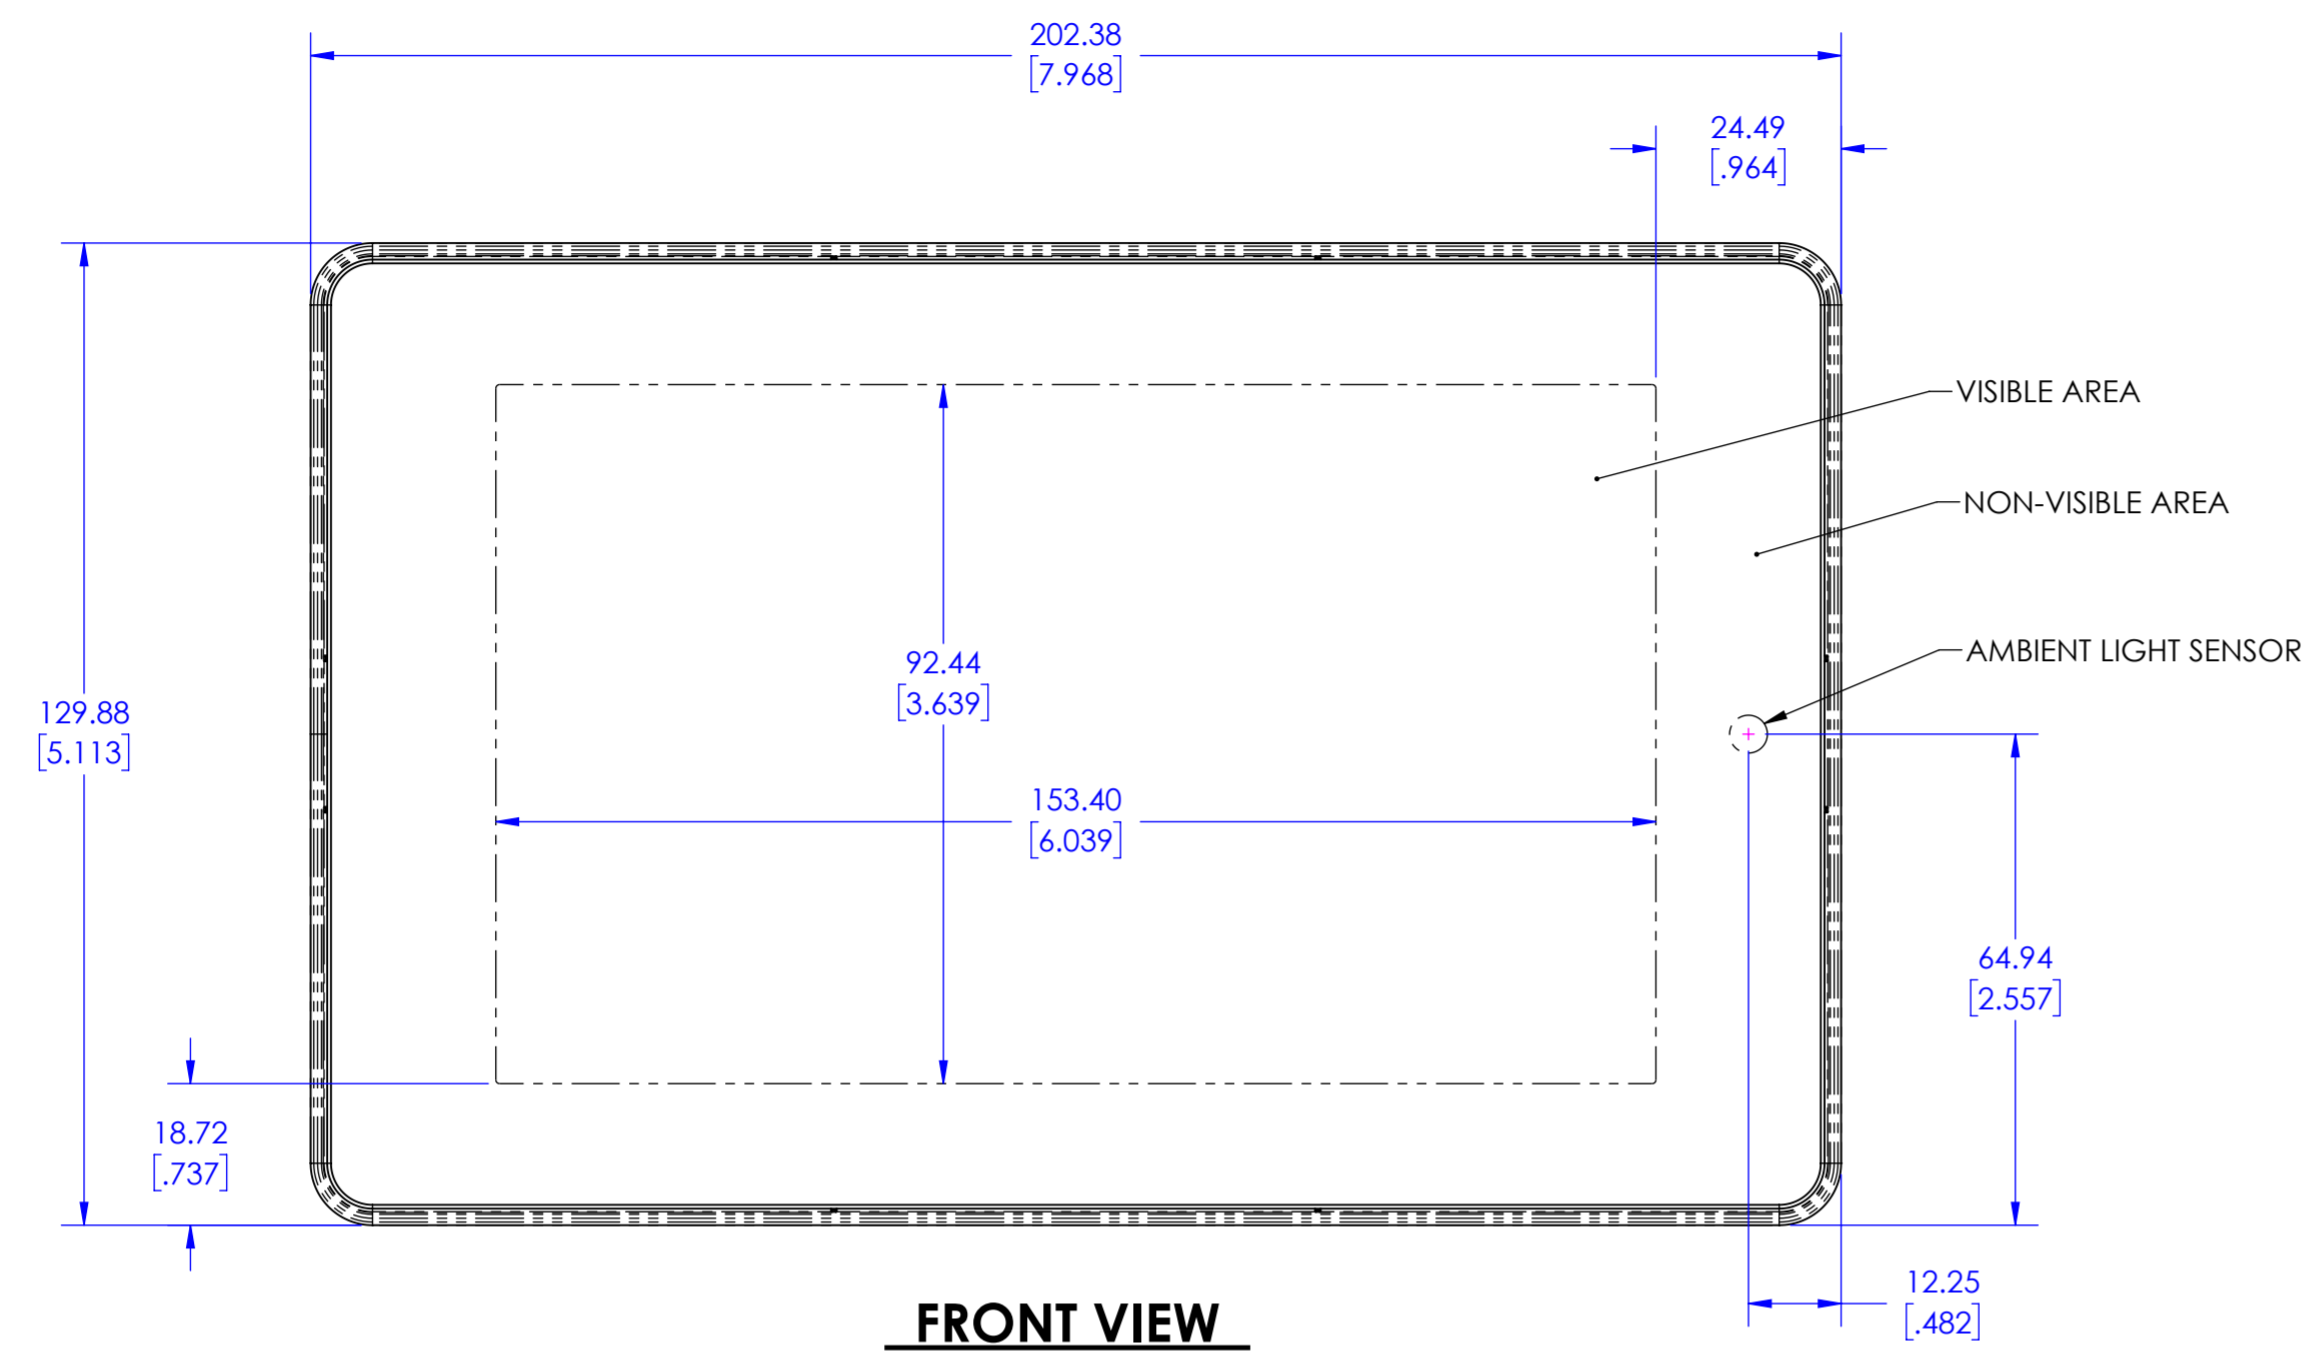

SIDE VIEW

- NOTES:
- MUST MEET CRITERIA OF ENOVATION CONTROLS QUALITY SPEC. 4E00715.
 - SEE SHEET 2 FOR SPECIFICATIONS AND ORDERING INFO.
 - SEE SHEET 3 FOR CONNECTOR PIN OUT.
 - SEE SHEET 4 FOR COSMETIC SPECIFICATIONS.
 - MOUNTING TORQUE: RECOMMENDED: 22 TO 28 IN-LBS, MAX: 30 IN-LBS (VEHICLE ASSEMBLY REFERENCE ONLY).
 - DIMENSIONS IN PARENTHESIS () ARE FOR REFERENCE ONLY. STANDARD TOLERANCES DO NOT APPLY TO THESE DIMENSIONS.

SHEET TOLERANCE: ±1.0mm [±.039in]		SHALL MEET REQUIREMENTS OF ENC 4E00711 ENVIRONMENTAL COMPLIANCE SPECIFICATION		METRIC DO NOT SCALE DRAWING		ENOVATION CONTROLS	
MATERIAL		PRODUCE PART FROM CAD MODEL 78020138.SLDASM		TECHNICAL SPECIFICATIONS, DISPLAY, 7" PV-P70			
FINISH		PART NUMBER 78020138		DRAWING NUMBER 78020138		REVISION	
		CAD FILE 78020138.SLDASM		SCALE 1:1 AND NOTED		SHEET SIZE A2 SHEET 1 OF 5	
						A1	

HOW TO ORDER

PV-P70-XXXX

PLATFORM OPTIONS

TNA2 = Touch, Not Connected, Audio 2 Zone
TC0A2 = Touch, Wifi + Bluetooth, Audio 2 Zone

ELECTRICAL & ENVIRONMENTAL SPECIFICATIONS

HARDWARE

DISPLAY:

7" (202.38mm (H) X 129.88mm (V)) LVDS TT LCD with LED backlight

COLOR:

24-bit color

RESOLUTION:

800 X 480 PIXELS

CONTRAST RATIO:

1000:1 (Typ.)

BRIGHTNESS:

1000 cd/m2

DISPLAY SURFACE:

Anti-glare

TOUCH PANEL:

Glove touch PCAP

REAL TIME CLOCK:

Li-Ion battery backup

CONNECTORS:

- (1) Ampseal 23 pin
- (1) Ampseal 23 pin
- (1) USB Bulkhead
- (1) GPS Fakra Antenna Jack (Optional)

VIDEO INPUTS:

(2) NTSC/PAL (Single channel viewable, Differential)

SENSORS:

- Internal GPS (Optional)
- Accelerometer (Optional)

COMMUNICATION

CAN:

(2) CAN 2.0B according to ISO-11898-2; J1939 and CANopen; proprietary messaging

USB:

(1) USB 2.0 High Speed Host (Optional)

WIFI:

802.11 b/g/n radio (Optional)

BLUETOOTH:

Fully integrated Bluetooth 5.0 class 1 (Optional)

ELECTRICAL

OPERATING VOLTAGE:

9 - 32 VDC, reverse polarity protected

OUTPUTS:

- (4) 500mA Switched Low-side
- (1) Analog Out (0 - 5V)
- (1) High-Side Digital (Battery level 10A)

INPUTS:

- (4) Analog 0-5VDC, 4-20mA, or resistive, 10-bit resolution
- (1) Discrete digital, active-high

INFOTAINMENT (TCLS,TCPS) (Optional)

STEREO:

- (2) Outputs (Stereo, 20Hz-20KHz, Differential)
- (1) Subwoofer (Mono, configurable, 30Hz-250Hz)
- (1) Amp Turn On/Accessory

USB MEDIA:

MP3, M4A Playback

BLUETOOTH:

Audio Streaming

ENVIRONMENTAL

OPERATING:

-40°C to +70°C [-40°F to +158°F]

STORAGE:

-40°C to +85°C [-40°F to +185°F]

PROTECTION:

IP66 and IP67, front and back, for outdoor use

VIBRATION:

ISO 15003: 3.9 Grms (10 - 350Hz), 3 axis

SHOCK:




±50G in 3 axis

EMC/EMI:

SAE J1113, ISO 13766, CE per 2014/53/EU


DESCRIPTION
TECHNICAL SPECIFICATIONS, DISPLAY, 7" PV-P70

PART NUMBER 78020138		DRAWING NUMBER 78020138		REVISION	
CAD FILE 78020138.SLDASM		SCALE 1:2 AND NOTED	SHEET SIZE A3	SHEET 2 OF 5	A1

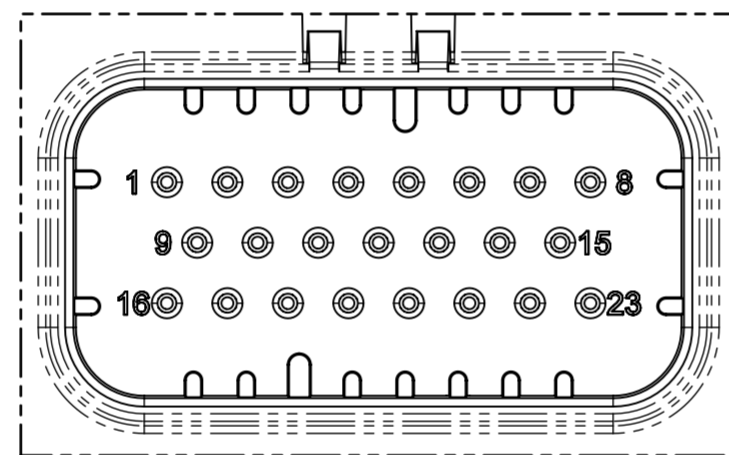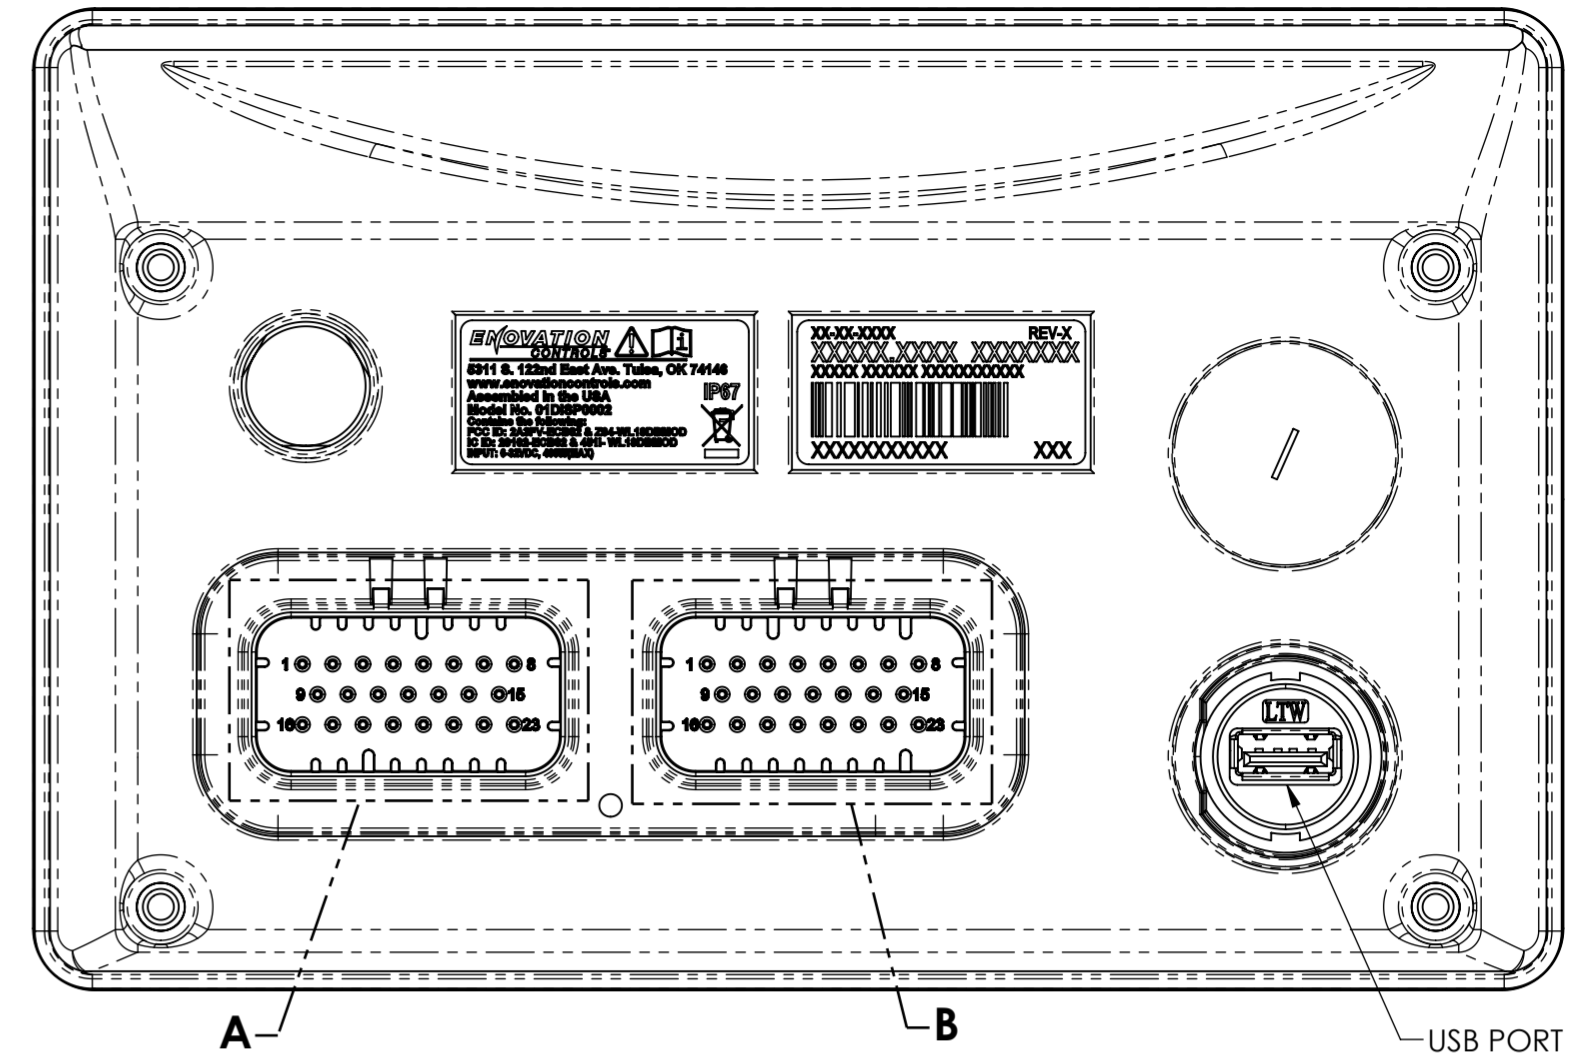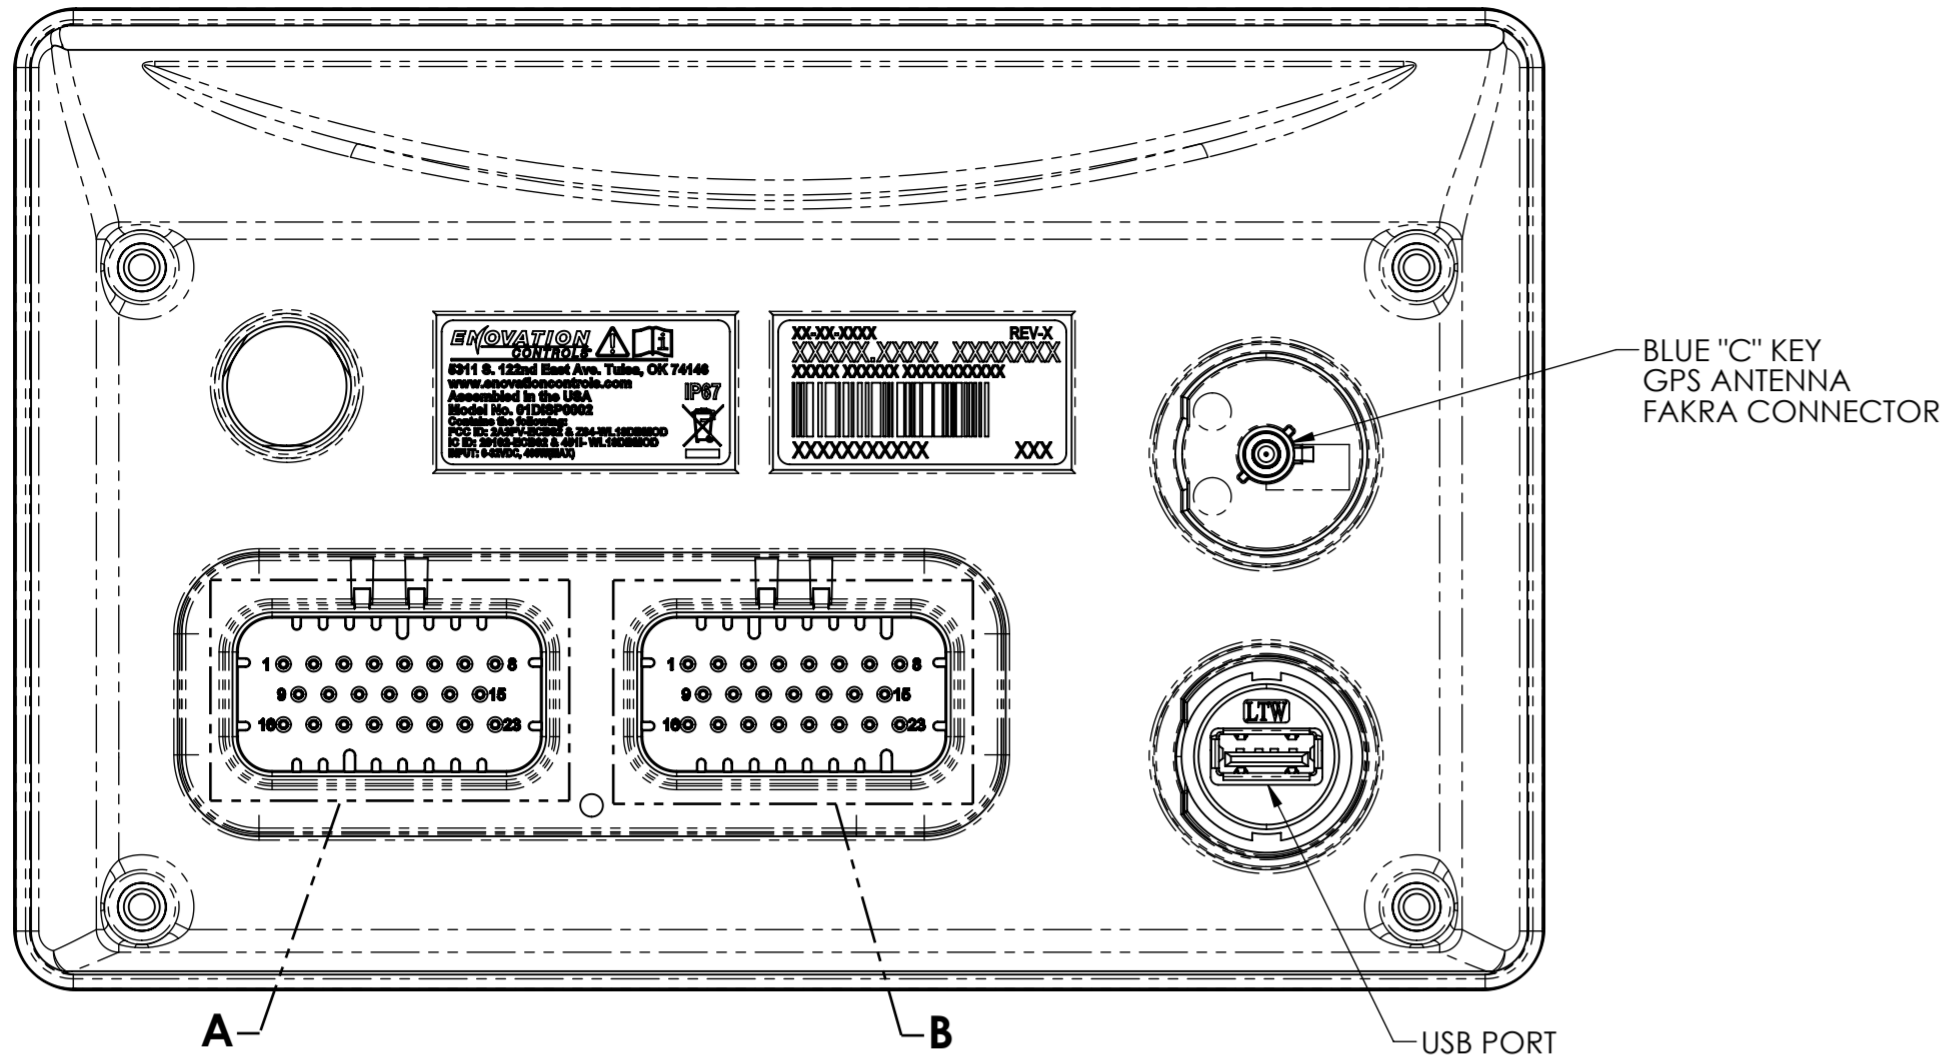

**DETAIL A
SCALE 2 : 1**

23 POSITION CONNECTOR - A (MATING CONNECTOR AMP 770680-2 NATURAL)	
PIN #	FUNCTION
1	DIGITAL OUT HS 1
2	DIGITAL OUT HS 1
3	HS DRIVER BATTERY
4	HS DRIVER BATTERY
5	HS DRIVER GROUND
6	HS DRIVER GROUND
7	BATTERY
8	GROUND
9	DIGITAL IN 1
10	DIGITAL IN 2
11	DIGITAL IN 3
12	DIGITAL IN 4
13	ANALOG RETURN
14	ANALOG RETURN
15	IGNITION
16	CAN1 L
17	CAN1 H
18	CAN2 L
19	CAN2 H
20	ANALOG IN 1
21	ANALOG IN 2
22	ANALOG IN 3
23	ANALOG IN 4



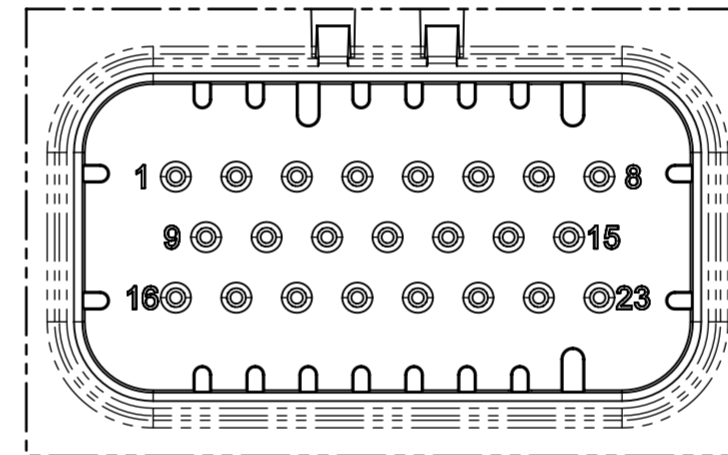


**DETAIL B
SCALE 2 : 1**

23 POSITION CONNECTOR - B (MATING CONNECTOR AMP 770680-5 BLUE)	
PIN #	FUNCTION
1	NC
2	LINE OUT 3 LEFT P
3	LINE OUT 3 LEFT N
4	DIGITAL OUT OD 1
5	DIGITAL OUT OD 2
6	VIDEO IN 2 P
7	VIDEO IN 1 P
8	ANALOG OUT RETURN
9	FREQUENCY IN RETURN
10	AMP TURN-ON
11	DIGITAL OUT OD 3
12	DIGITAL OUT OD 4
13	VIDEO IN 2 N
14	VIDEO IN 1 N
15	ANALOG OUT
16	LINE OUT 1 LEFT P
17	LINE OUT 1 LEFT N
18	LINE OUT 1 RIGHT P
19	LINE OUT 1 RIGHT N
20	LINE OUT 2 LEFT P
21	LINE OUT 2 LEFT N
22	LINE OUT 2 RIGHT P
23	LINE OUT 2 RIGHT N

DESCRIPTION
**TECHNICAL SPECIFICATIONS, DISPLAY,
7" PV-P70**

PART NUMBER 78020138	DRAWING NUMBER 78020138	REVISION A1
SCALE 1:1 AND NOTED	SHEET SIZE A2	SHEET 3 OF 5

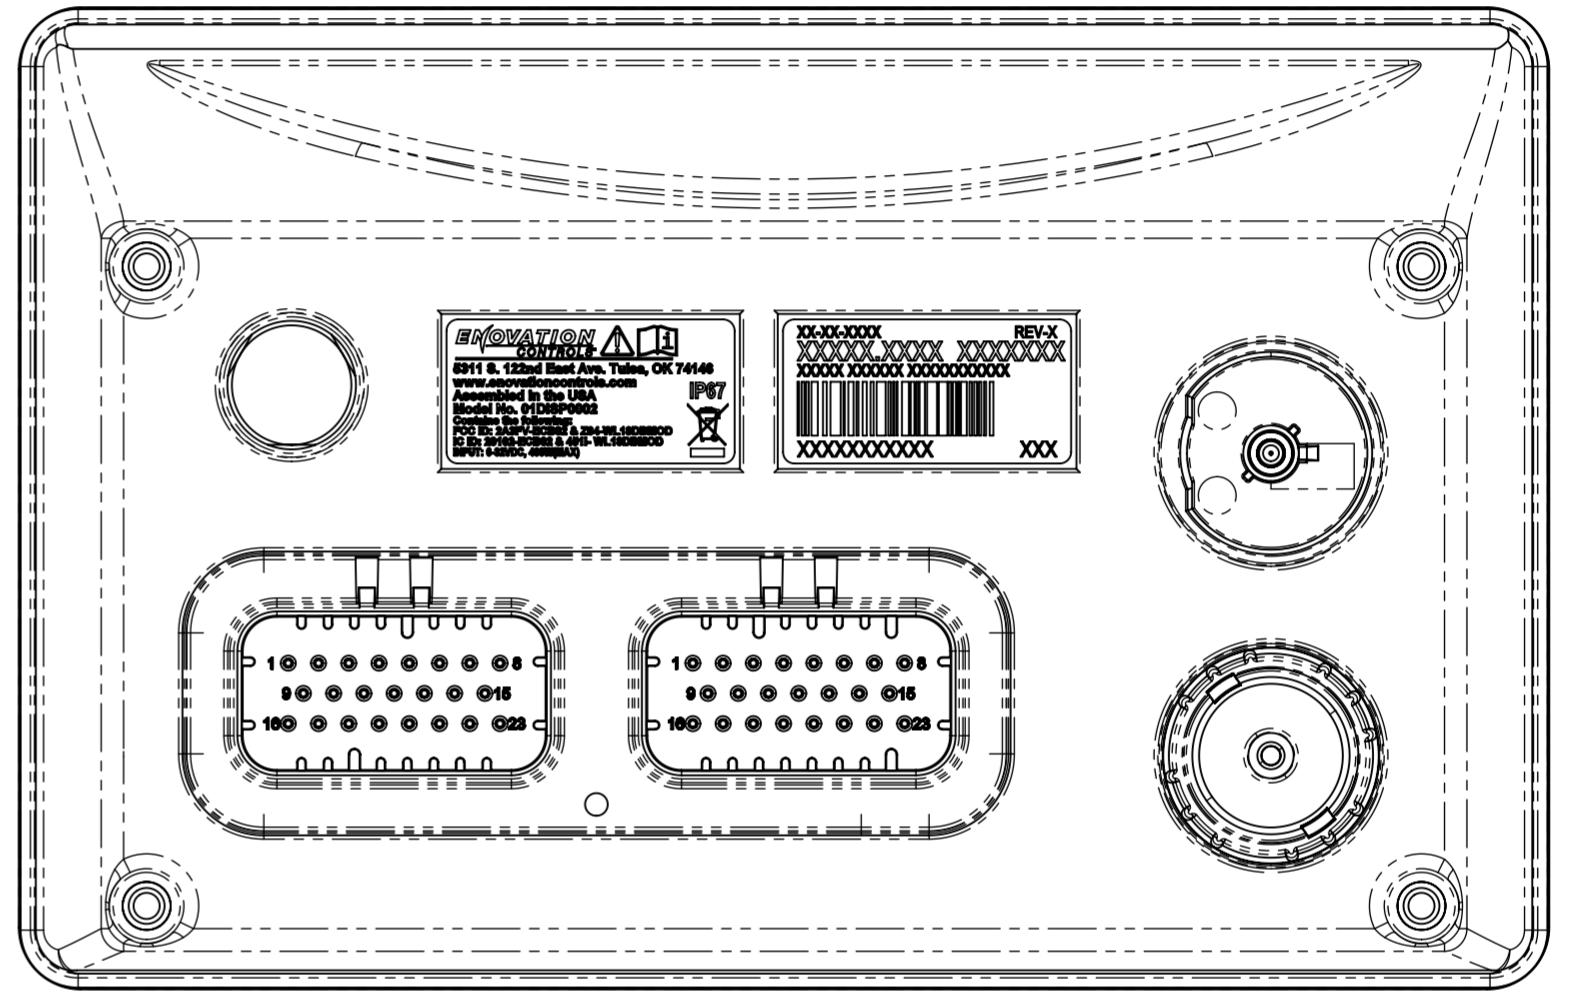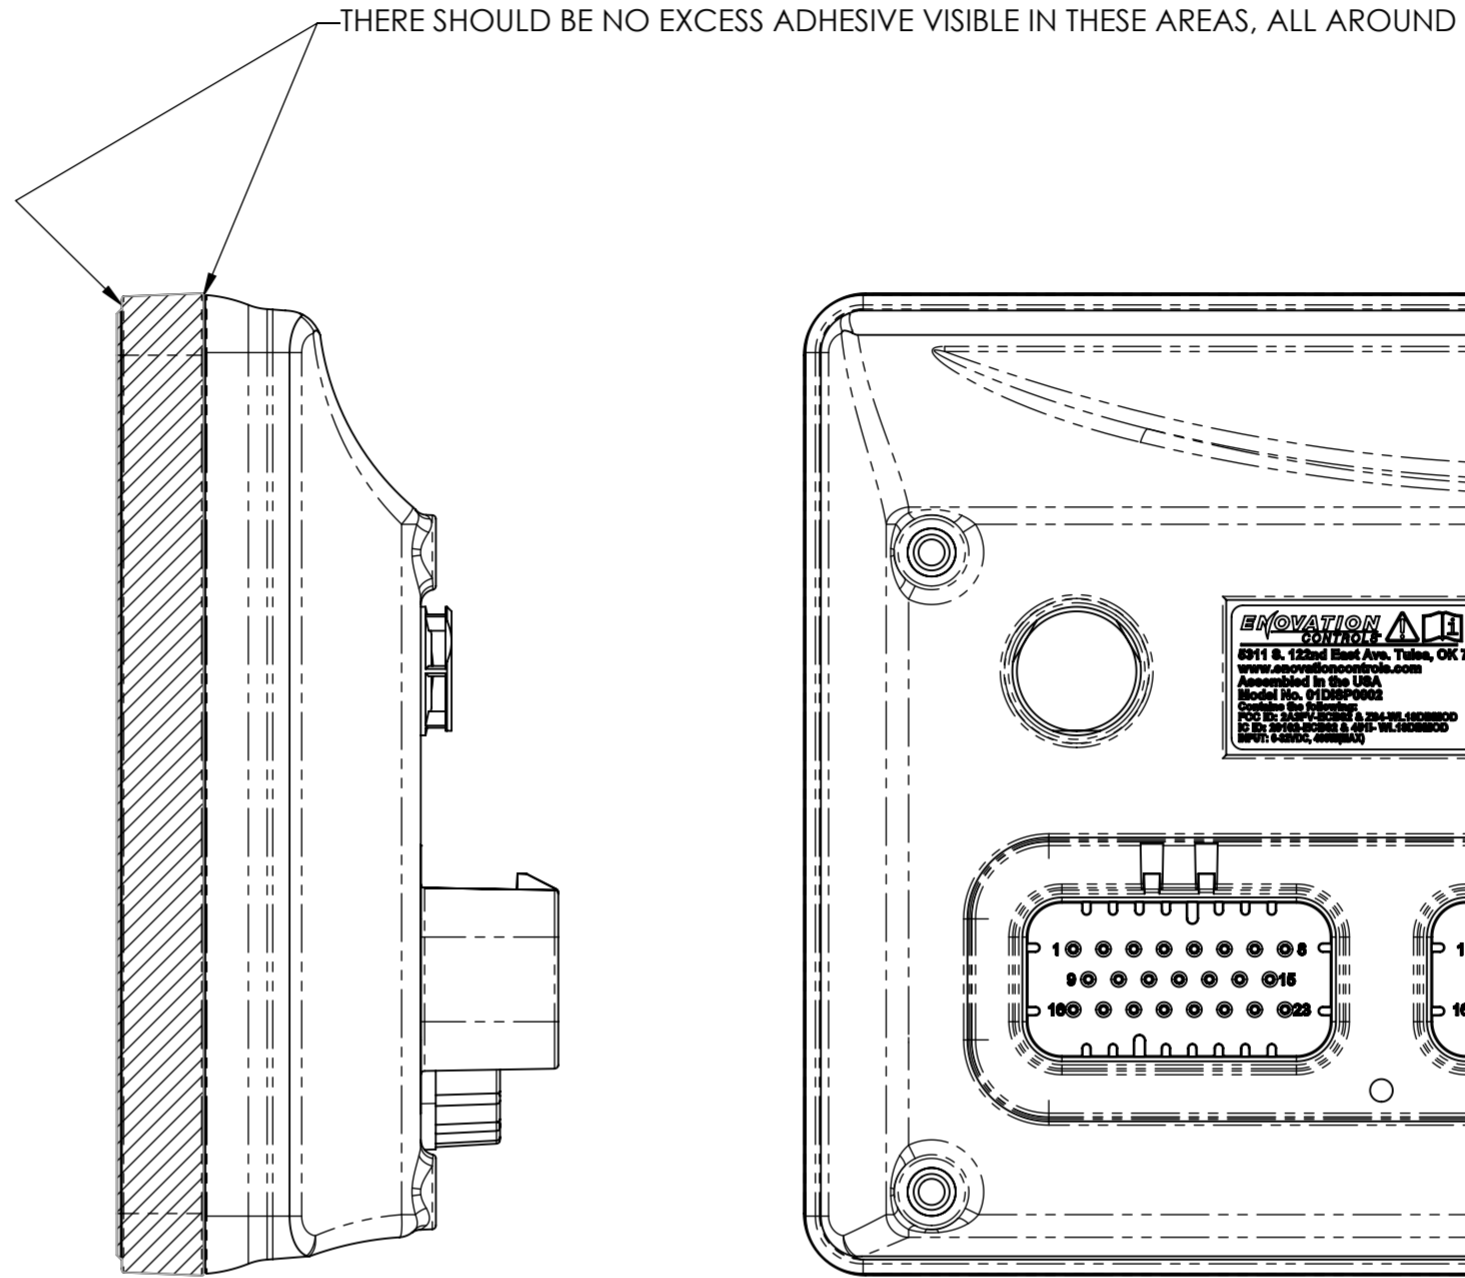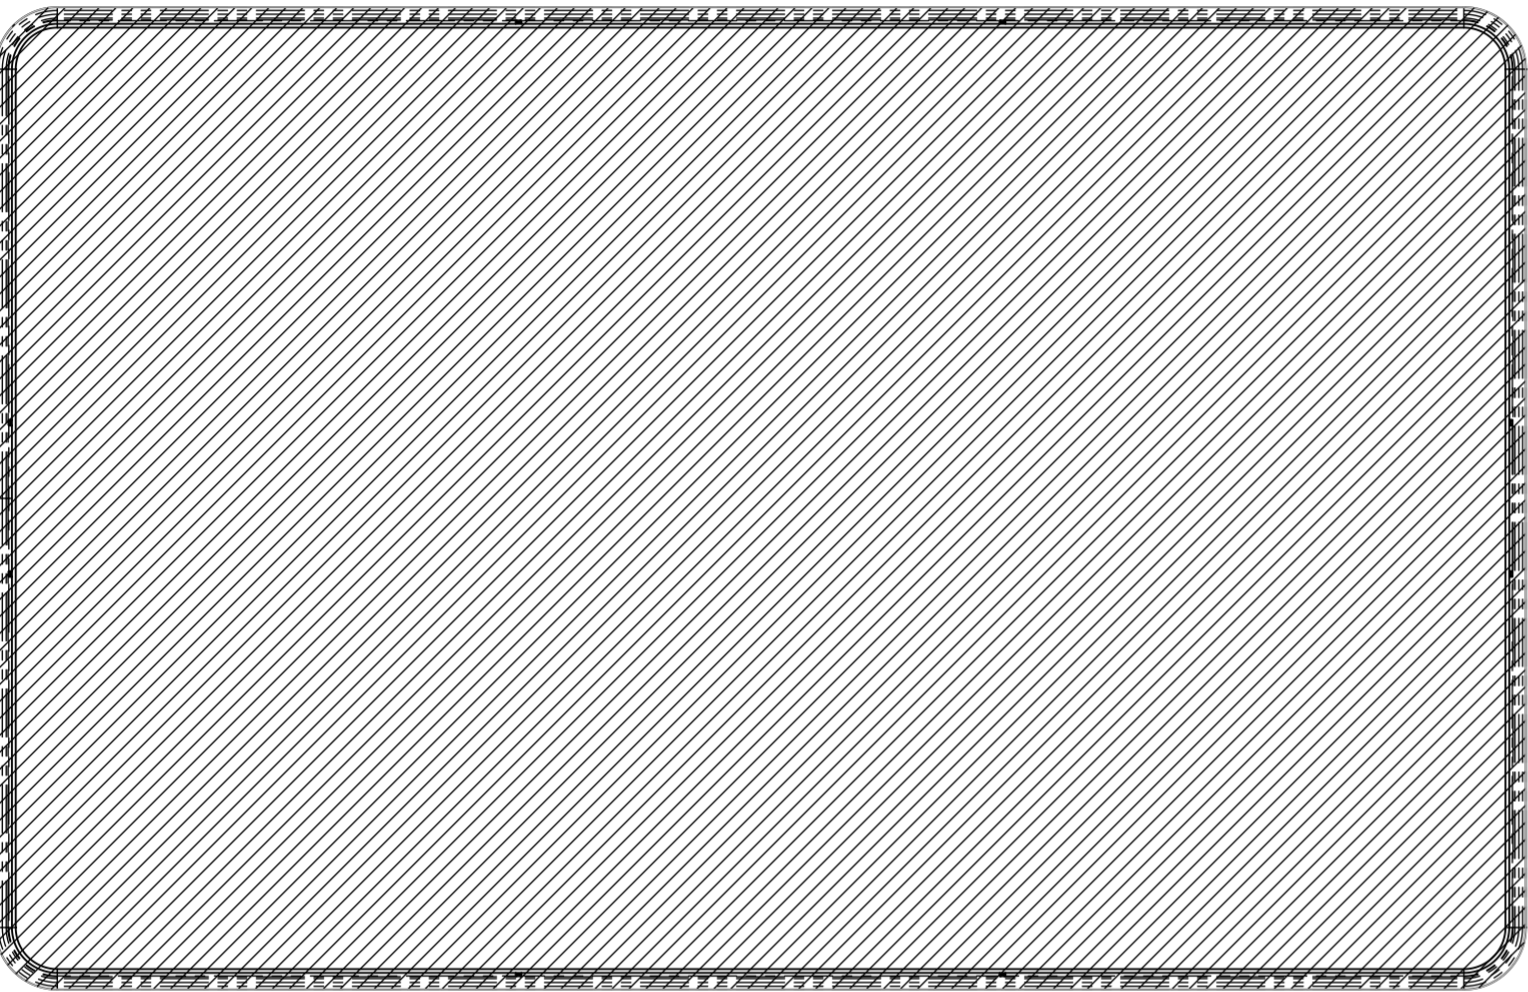

 SURFACE "A"

NOTES:

- 1.  SURFACE "A" MUST MEET CRITERIA OF ENOVATION CONTROLS QUALITY SPEC. 4E00715.

DESCRIPTION TECHNICAL SPECIFICATIONS, DISPLAY, 7" PV-P70			
PART NUMBER 78020138	DRAWING NUMBER 78020138	REVISION	
SCALE 78020138.SLDASM	SCALE 1:1 AND NOTED	SHEET SIZE A2	SHEET 4 OF 5
			A1



DESCRIPTION			
TECHNICAL SPECIFICATIONS, DISPLAY, 7" PV-P70			
PART NUMBER	DRAWING NUMBER	REVISION	
78020138	78020138	A1	
CAD FILE	SCALE	SHEET SIZE	SHEET
78020138.SLDASM	1:1 AND NOTED	A2	5 OF 5