


IF IN DOUBT ASK

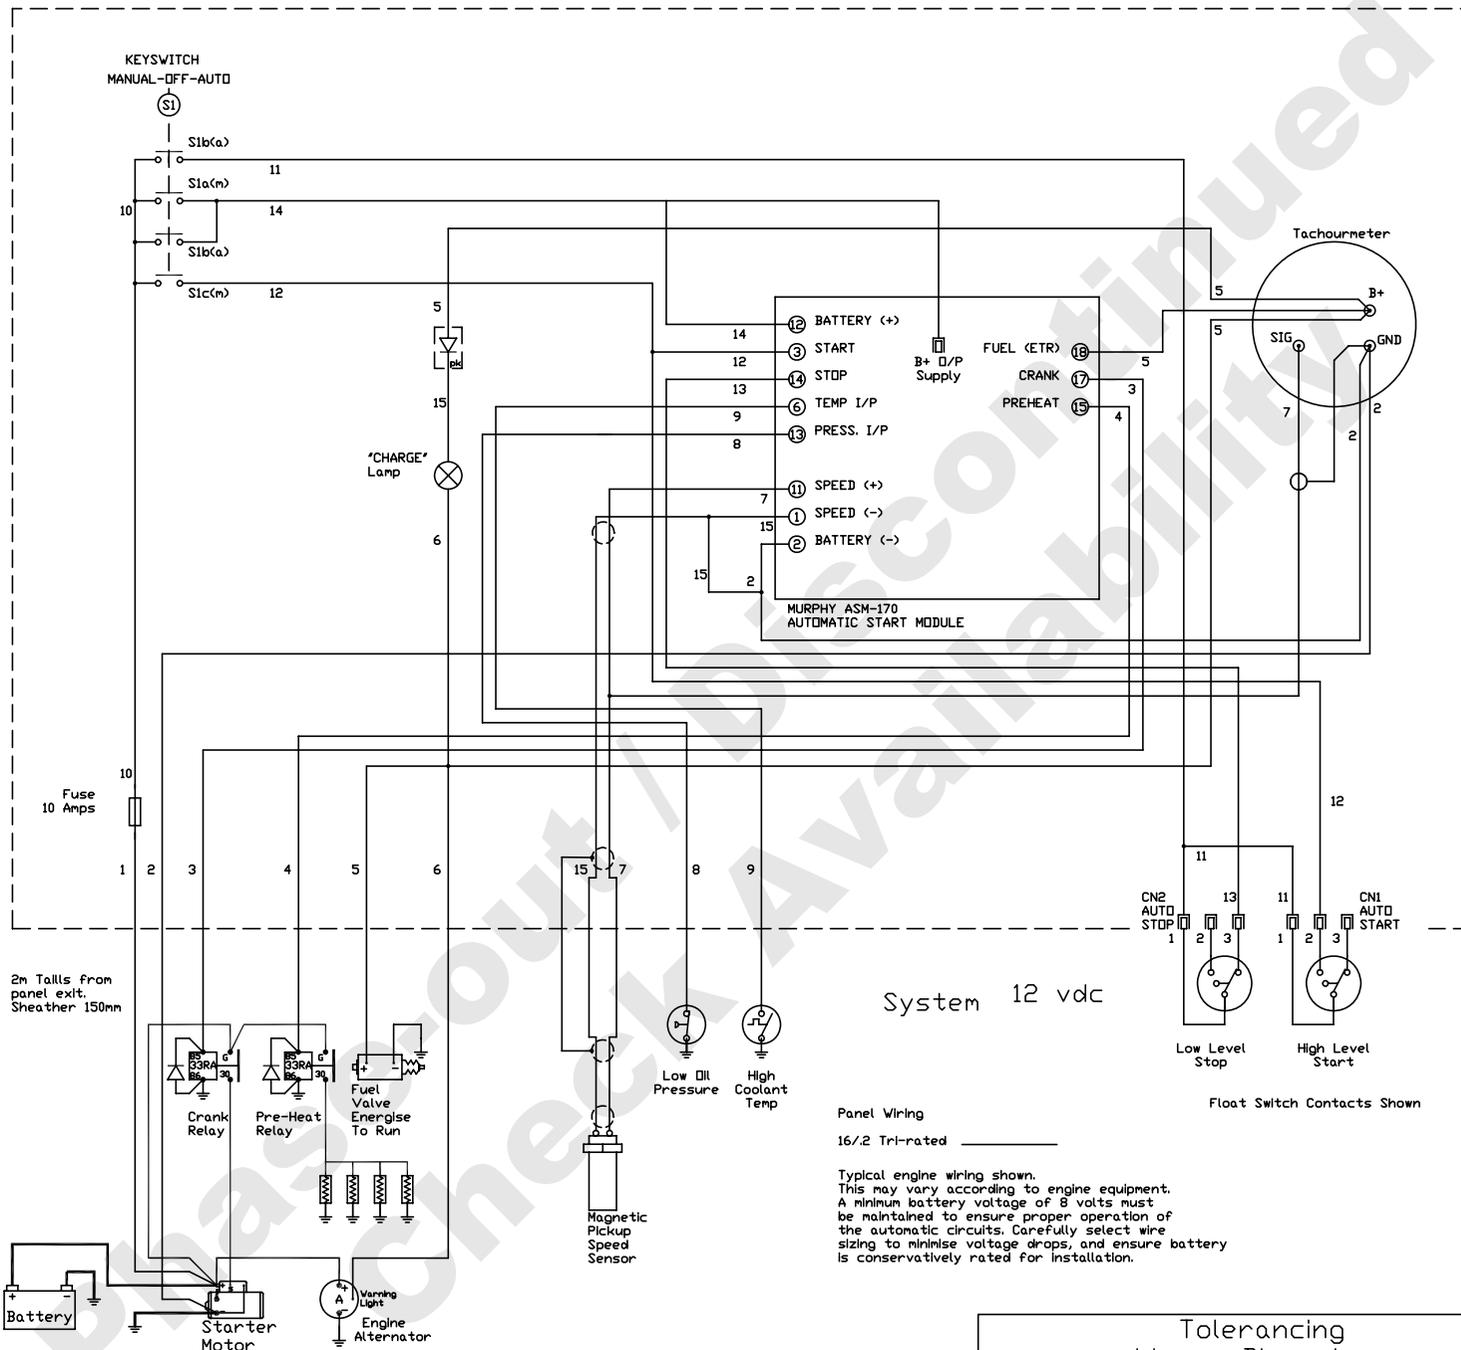

NOTE:
Crank disconnect
speed will need to
be calibrated by
customer (Pot R3)

Panel Wiring

16/2 Tri-rated

Typical engine wiring shown.
This may vary according to engine equipment.
A minimum battery voltage of 8 volts must
be maintained to ensure proper operation of
the automatic circuits. Carefully select wire
sizing to minimise voltage drops, and ensure battery
is conservatively rated for installation.

Float Switch Contacts Shown

REV	REVISION DETAILS	DATE	NAME
A	Added link from 2 to 15	25/04/05	GAD

MAT.	N/A
FINISH	N/A
SCALE	NTS
DRAWN	GAD
DATE	07/04/05

Tolerancing Linear Dimensions Nominal dimensions in mm								
0.5	6	30	120	315	1000	2000		
to	to	to	to	to	to	to		
6	30	120	315	1000	2000	4000		
±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2		

FRANK W. MURPHY LTD
SWITCHGAGE HOUSE, CHURCH ROAD, LAVERSTOCK,
WILTSHIRE, SALISBURY, ENGLAND, SP1 1QZ.
TELEPHONE +44 1722 410055
FAX +44 1722 410088
e-mail sales@fwmurphy.co.uk
Visit Our Web Site At -
www.fwmurphy.co.uk

TITLE	Auto Engine Pump Controller Schematic
DRAWING No	SE6448