



MURPHY[®]
by **ENOVATION CONTROLS**

EMS PRO LITE

COMPACT, FLEXIBLE INDUSTRIAL PUMP CONTROLLER

	Perfect for Dewatering and Irrigation Applications
	Pressure, Level and Float Start/Stop Types
	Backlit Graphical Display and Alarm Indicating LEDs
	Wide Operating Temperature Range
	Supports Mechanical and Electronic Engines





Looking for an industrial pump controller tailored for specialized applications?

EMS PRO LITE was designed with dewatering and irrigations applications in mind. The controller features a compact enclosure and focused feature set, including pressure, level and float start/stop types for the ideal balance of functionality and control needed to perform specific application functions.

The user-friendly interface features eight touch buttons and a backlit graphical display visible in all types of conditions. The interface is mounted directly to the front of the NEMA 4 enclosure for easy access and operation.

See the full specifications on the back of this sheet for a full overview of EMS PRO LITE technical features.

STANDARD DIMENSIONS

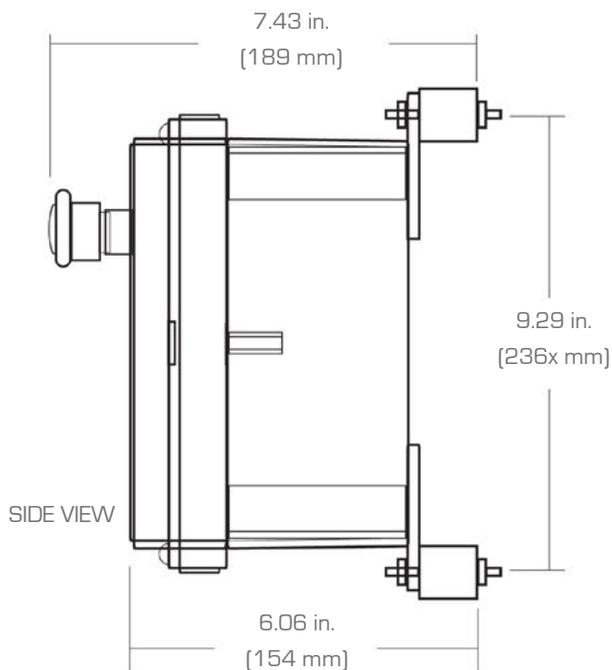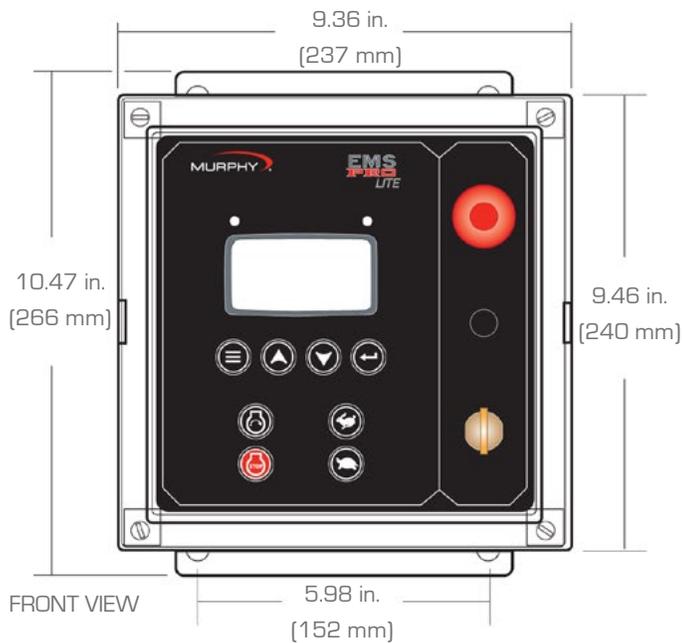

TECHNICAL SPECS:

- Operating Voltage: Engineered for 12VDC systems (8 VDC Minimum to 14.4 VDC Maximum)
- Operating Temperature and Storage Temperature: -40° to 80°C (-40° to 176°F)
- Standby Current: @ 12V, 140mA
- LEDs: 2 - Alarm (Amber); Shutdown (Red)
- CAN Bus: SAE J1939 Compliant
- Enclosure: Polycarbonate Nema 4 (UL Listed)
- Analog Inputs: 6 designated via program; sender/ground digital, 4 - 20 mA, 0 - 5VDC
- Digital Inputs: 4 high/low
- Frequency Input: 1 optically isolated input for speed reference, magnetic pick-up (30 - 10kHz)
- Fuel Sender Input: 33 Ohm full, 240 Ohm empty
- Analog Output: 1 dedicated for analog throttling (0.4 - 4.6VDC)
- Digital Outputs: 6 dedicated via program
- Relays: 2 SPDT Common NO wired, rated @ 8 Amps as installed
- User Interface: 8 button membrane switch
- Connectors: One 21 pin Deutsch HDP20 and One 9 pin Deutsch HD10 Series
- Environmental Sealing: IP65
- Mounting: 4 isolated 0.75 inch rubber shock mounts
- Shipping Weight: 7 Lb. (3.2 kg)
- Shipping Dimensions: 12 x 12 x 10 in. (304.8 x 304.8 x 254 mm)

ENOVATION CONTROLS CORPORATE HEADQUARTERS

5311 S 122ND EAST AVENUE
TULSA, OK 74146

ENOVATION CONTROLS – SAN ANTONIO OFFICE

5757 FARINON DRIVE
SAN ANTONIO, TX 78249

ENOVATION CONTROLS – HOUSTON OFFICE

105 RANDON DYER RD
ROSENBERG, TX 77471

ENOVATION CONTROLS LTD. – UNITED KINGDOM

CHURCH ROAD LAVERSTOCK
SALISBURY SP1 1QZ UK

MURPHY ECONTROLS TECHNOLOGIES (HANGZHOU) CO, LTD.

77 23RD STREET
HANGZHOU ECONOMIC & TECHNOLOGICAL DEVELOPMENT AREA
HANGZHOU, ZHEJIANG 310018 CHINA

U.S. SALES & SUPPORT

ECONTROLS PRODUCTS

PHONE: 210 495 9772
FAX: 210 495 9791
EMAIL: INFO@ENOVATIONCONTROLS.COM
WWW.ECONTROLS.COM

MURPHY PRODUCTS

PHONE: 918 317 4100
FAX: 918 317 4266
EMAIL: SALES@ENOVATIONCONTROLS.COM
WWW.FWMURPHY.COM

MURPHY CONTROL SYSTEMS & SERVICES

PHONE: 281 633 4500
FAX: 281 633 4588
EMAIL: CSS-SOLUTIONS@ENOVATIONCONTROLS.COM

MURPHY INDUSTRIAL PANEL DIVISION

PHONE: 918 317 4100
FAX: 918 317 4124
EMAIL: IPDSALES@ENOVATIONCONTROLS.COM

INTERNATIONAL SALES & SUPPORT

UNITED KINGDOM

PHONE: +44 1722 410055
FAX: +44 1722 410088
EMAIL: SALES@ENOVATIONCONTROLS.EU
WWW.FWMURPHY.EU

CHINA

PHONE: +86 21 6237 5885
FAX: +86 21 6237 5887
EMAIL: APSALES@ENOVATIONCONTROLS.COM

LATIN AMERICA & CARIBBEAN

PHONE: 918 317 2500
EMAIL: LASALES@ENOVATIONCONTROLS.COM

SOUTH KOREA

PHONE: +82 70 7951 4100
EMAIL: SKOREASALES@ENOVATIONCONTROLS.COM

INDIA

PHONE: +91 91581 37633
EMAIL: INDIASALES@ENOVATIONCONTROLS.COM



FM 28221 (Tulsa, OK - USA)
FM 620657 (San Antonio, TX - USA)
FM 28221 (Rosenberg, TX - USA)
FM 29422 (UK)



FM 523851 (China) TS 589322 (China)